



ENDOCAM Logic HD

The Future is Logic

The perspectives in vision



ENDOCAM Logic HD combines **flexibility and versatility in a unique dimension**. Sharpen your focus for brilliant images and a lot of smart options. The most advanced options reflect the latest technological development status. Future-proof concepts provide assurance that you will also be optimally equipped for the future.

Highly developed dialog function

The dialog function permits automatic control of the light source through the camera. Users don't have to make any further adjustments – a decisive step toward more operating comfort.

Full
HD

1080p

HDMI

3G
SDI



Versatile connection options

ENDOCAM Logic HD is configured for the Full HD image transmission standard. The platform also offers maximum flexibility in this area.


Exceptional flexibility

ENDOCAM Logic HD permits the C-MOS sensor technology. A needs-oriented selection of highly developed camera heads leaves absolutely nothing to be desired. You benefit from convenient digital technology, newly developed sensor endoscopes with

chip-on-the-tip technology and lots more. The camera concept is supplemented by smart LED light sources, efficient light guides and powerful monitors.

Eye to eye with the future

Details in view, technology under control

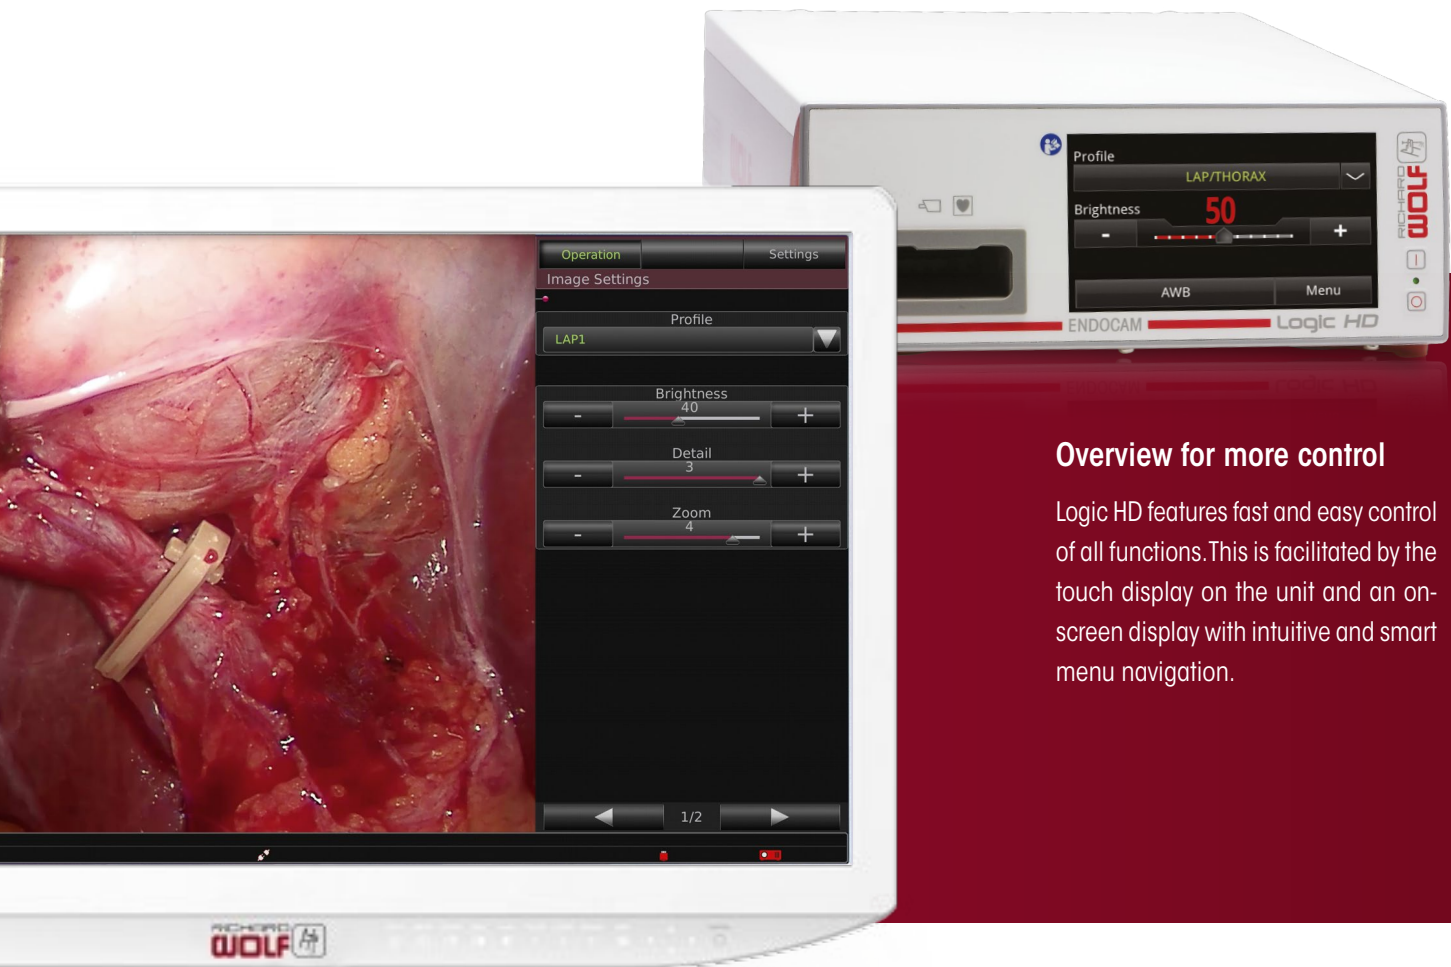

Overview for more control

Logic HD features fast and easy control of all functions. This is facilitated by the touch display on the unit and an on-screen display with intuitive and smart menu navigation.



High-definition for brilliant details








ENDOCAM Logic HD delivers pin-sharp images with maximum brightness and depth of detail.

Profiles specialized for efficiency

ENDOCAM Logic HD has a large number of preset application profiles that have been tested in clinical settings and can be quickly selected. Speciali-

zation and easy handling create efficiency in every operating situation. Users are also able to specify a large number of settings themselves and

define their own profiles. Menu navigation is carried out in a choice of different languages.

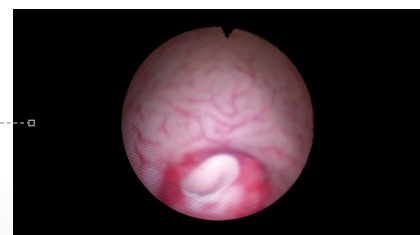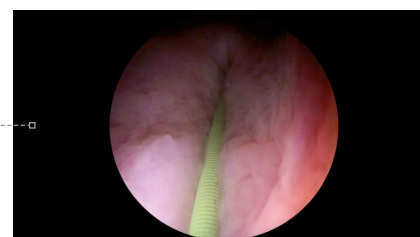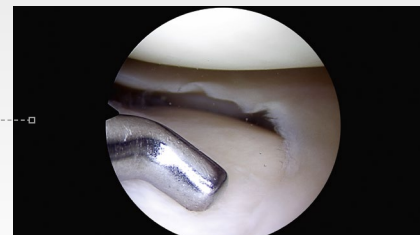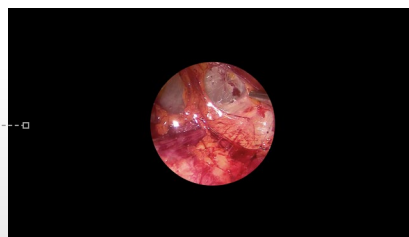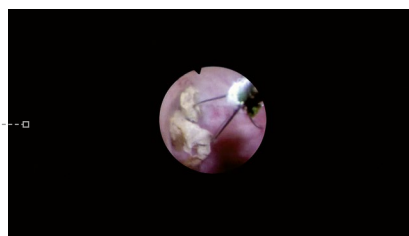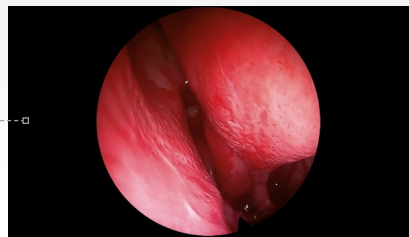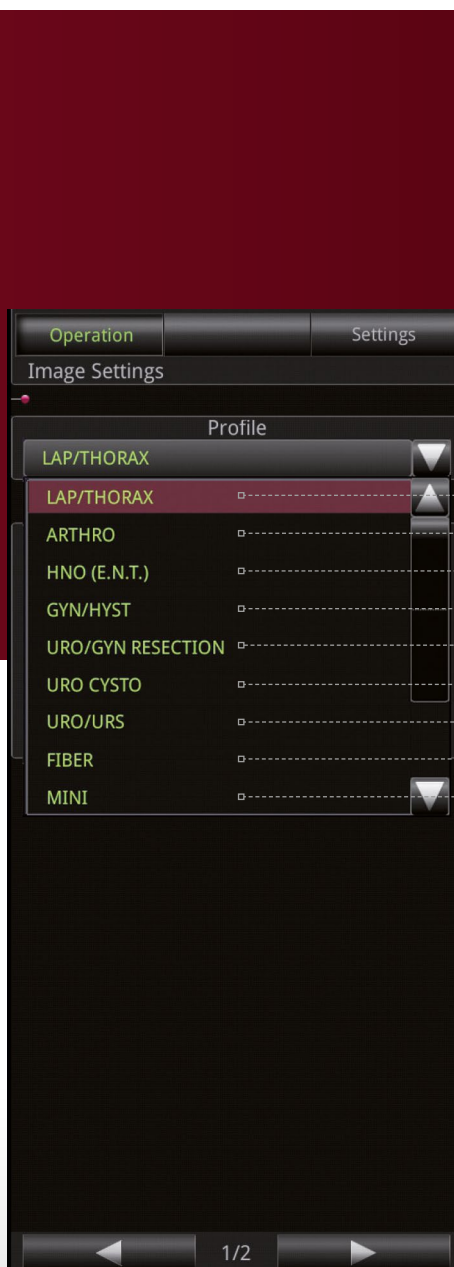

The Digital OR





RIWOLINK

A Richard Wolf Company

The OR integration system from Richard Wolf impresses with convenient documentation options, intuitive video routing, easy operation, and low installation effort.

The ENDOCAM Logic camera system forms the heart of OR integration.

Further information can be found at:
www.riwolink.com

ENDOLIGHT LED 2.2



HighLights in the system

The automatic **ENDOLIGHT** light sources combine clear, intensive light with convenient application. The dialog link creates the ideal systems partner for **ENDOCAM Logic HD**.

The light sources operate almost silently and with very low operating costs. The LED lamp has a service life of approximately 30,000 hours.

The system of the future

Focus on success with ENDOCAM Logic HD

ENDOCAM Logic HD is different

Compared with previous systems, the digital processing is carried out in the camera head. This provides flexibility and optimizes signal transfer to the controller.

1 CMOS HDTV camera head

- Image format 16:9
- Autoclavable
- Extremely low weight



Pendulum camera head "PENDUAL", 1 CMOS HD format 5:4

The pendulum housing ideal for resection can by a simple twist action be converted to an axial head (e.g. for rigid URS).



reddot design award
winner 2012

Snap-on lock

- For intuitive positioning of the lens on the endoscope
- Parfocal zoom lens 13–29 mm for maximum flexibility



Ordering data

ENDOCAM LOGIC HD Ordering data		
	ENDOCAM LOGIC HD CONTROLLER SET , comprising: ENDOCAM LOGIC HD Controller (552510x), remote control (5525401), USB flash MEMORY 8GB (56540028), CAN BUS Terminator (5590989), HDMI / DVI-D cable lockable 3.0 m (103843), power cable. Controller equipment versions: 2x HDMI out 55251011 2x HDMI out / 2x 3G-SDI out 55251051 2x HDMI out / 2x 3G-SDI out / PIP in 55251061	
	 1-CHIP HD CAMERA HEAD ENDOCAM LOGIC HD , C-Mount, digital image processing and digital signal transfer, 2 programmable camera head buttons, cable outlet angled, camera cable can be replaced by Service on site. Autoclave, 1/3 inch image sensor, Cable length: 3 m 85525902	
	PENDUAL HD camera head ENDOCAM LOGIC HD , twist housing providing two operating modalities: 1: Pendulum camera head, 2: straight camera head, integrated lens f = 14 mm, freely rotating snap-on lock with latch function, 1/3 inch image sensor, digital image processing and digital signal transfer, two programmable camera head buttons, camera cable can be replaced by Service on site. Cable length: 3 m 5525933	
	For universal use	RIWO Zoom Lens, f = 13 – 29 mm , with C-mount thread and snap-on lock, disinfectable and autoclavable, f = 13 – 29 mm, optimized for 1/3" image sensors 85261504
	Use for endoscopes with Ø ≥ 7 mm	RIWO Lens, f = 24 mm , with C-mount thread and snap-on lock, disinfectable and autoclavable, f = 24 mm, optimized for 1/3" image sensors 85261244
	Use for endoscopes with Ø < 7 mm	RIWO Lens, f = 14 mm , with C-Mount thread and snap-on lock, disinfectable and autoclavable, f = 14 mm, optimized for 1/3" image sensors 85261144
	ENDOLIGHT LED 2.2 complete consisting of ENDOLIGHT LED 2.2 (5164001), Patch cable, RJ45 SFTP, 0.5 m (72325378) and power cable (2440.03) 51640011	

Subject to modifications. Please note that some products may not be available in all countries. Please always take note of the information that is provided with the product. For more detailed information, please consult with your contact partner or directly with Richard Wolf GmbH.